

ปูนลูกดิ่ง ปูนจิงโจ้



PRODUCTS CATALOG

THE MORTAR EXPERT

Green Industry กระทรวงอุตสาหกรรม | ISO 9001:2015 | ISO 14001:2015 | มอก.2706-2559 | มอก.2735-2559 | มอก.3056-2563 | มอก.3202-2564 | มอก.598-2566 | มอก.1776-2566 | มอก.2703-2566

QUICKCOAT
THE MORTAR EXPERT

Quick Coat Products Co., Ltd. is a manufacturer and distributor mortar.
The Company was founded in 1993 by a group of experts in many fields such as chemists, engineers and geologists who jointly developed a mortar product that is most suitable for plastering lightweight block.With the determination and endeavor of the experiment, we have developed **The first and the best plastering mortar for lightweight block in Thailand** under the brand **"PLUMB"** or **"RED PLUMB"** and the masonry mortar for lightweight block under the brand **"KANGAROO 2IN1 Masonry and Tile Adhesive Mortar"** or **"PURPLE KANGAROO"** which were well known among all builders to this day





QUICKCOAT

Over the past 30 years, we have produced more than **1 billion bags** of mortar-helping build over **4 million homes**. We have been part of many of the country's leading projects, delivering countless smiles and happiness to families everywhere.
We are committed to delivering the best-quality mortar into the hands of every craftsman and customer, true to our mission of being the **"The Mortar Expert"**





Head Office
Nakhon In Rd., Nonthaburi



Factory
Mueang District, Ratchaburi Province on an area of over 90 rai.

QUICK Delivery
Fast delivery service.

QUICK Technical Support
Fast technical service.

QUICK Customer Service
Fast customer service.

Robotic Production system 100%

Our mortar is produced with German production technology,
and we also serve as a distribution hub supplying retailers and construction sites across Thailand.



Green Industry กระทรวงอุตสาหกรรม | ISO 9001:2015 | ISO 14001:2015 | มอก.2706-2559 | มอก.2735-2559 | มอก.3056-2563 | มอก.3202-2564 | มอก.598-2566 | มอก.1776-2566 | มอก.2703-2566

International quality standard and environmental friendliness



We carefully select premium raw materials to produce high-quality mortar.



Our production is powered by clean, renewable energy generated by over 2,000 solar panels.



Every batch is strictly inspected, ensuring every bag meets our quality standards before delivery.

Quickcoat Products **for Construction Solutions**

Plastering



Plastering Mortar for Lightweight Block



Plastering Mortar for General Block



Plastering Mortar for Concrete Block

Masonry



Masonry and Tile Adhesive Mortar



Masonry Mortar for General Block

Wall Repair



Repair Mortar



Crack Repair Mortar (with Sand)



Crack Repair Mortar (without Sand)

Tile Adhesive



Masonry and Tile Adhesive Mortar



SuperSave Tile Adhesive Mortar (BLUE KANGAROO)



Standard Tile Adhesive Mortar (GREEN KANGAROO)



Waterproof Tile Adhesive Mortar (RED KANGAROO)



Highest Strength Tile Adhesive Mortar (GOLDEN KANGAROO)



KANGAROO Tile Grout



Skimcoat



Skimcoat (White)



Skimcoat (Grey)



Skimcoat (Light Grey)



Super Skimcoat (White)



Skimcoat (Loft Style)

Construction Chemicals

PLUMB Water Repellent Semi-Gloss



PLUMB Bonding Agent Latex



PLUMB 2K Flexible waterproofing cement 2K

Flooring



Easy Floor Screed



Floor Levering Mortar



Dry Premixed Concrete



Non-Shrink Grout

ปูนลูกดิ่ง

PLUMB, Good Mortar and a Builder's Secret

A plumb (Lookding) is a tool for builders.
It is a plummet with a pointed end
and a rope attached at the other.
It is used to find a vertical line perpendicular
to the earth to serve as a reference line
for construction.

A plumb is also one of the tools of Vishnu,
the father of construction, held in his left hand.
All Thai builders considered it as a symbol
of precise and accurate construction.

PLUMB is a representative brand of mortar
products for plastering, skim coat
and special repair under
Quick Coat Products Co., Ltd.

"RED PLUMB"
Plastering Mortar for Lightweight Block
is our first product that has established
a reputation for our organization,
the characteristics of plumb also reflect
the vision of management and business
practices of an organization
that focuses on precision, fairness and honesty
to customers, partners
and employees in the organization.



มอก.2735-2559

PLUMB

Plastering Morta for Lightweight Block



No.1 Plastering Mortar For Lightweight Block

มอก.3056-2563

New Formula

PLUMB Skim Coat





Easy to sand

Ultra-Smooth Finish

100%* Flawless coverage

*For covering small hairline cracks or coarse sand-textured walls, apply at a thickness of no more than 2 mm.

ปูนลูกดิ่ง

Comparison of applications of products

Type of product	Plastering			Thin Plastering / Skim Coat					Special Repair		Construction Chemicals		
	 D01	 D02	 D03	 D15	 D12	 D13	 D14	 D16	 D05	 D06	 D08	 D10	 D11
	Plastering Mortar for Lightweight Block	Plastering Mortar for General Block	Plastering Mortar for Concrete Block	Skim Coat (White)	Skim Coat (Grey)	Skim Coat (Light Grey)	Super Skim Coat (White)	Loft Cement for Decoration	Crack Repair Mortar (With Sand)	Crack Repair Mortar (Without Sand)	Bonding Agent Latex	Water Repellent Semi-Gloss	Flexible Waterproofing Cement 2K
Wall material													
Lightweight block	✓												
Red block, General block, White block	✓	✓	✓										
Concrete structure			✓										
For use with mortar sprayers	✓	✓	✓										
Decoration and Repair surfaces													
Fixing coarse-grained, uneven, wavy wall, hairline crack				✓	✓	✓	✓	✓					
Bare cement wall, concrete wall ***				✓	✓	✓	✓	✓					
Prefabricated wall (Precast, Wall panel, Tunnel form) ***				✓	✓	✓	✓	✓					
Soft wall (fiber cement, gypsum board, cement board) ***				✓	✓	✓	✓	✓					
Loft Cement for Decoration								✓					
Old wall, Painted wall (Modification)							✓	✓					
For use with skim coat sprayer				✓	✓	✓	✓						
Other													
Crack Repair									✓	✓			
Bonding between old concrete and new concrete											✓		
Loft walls, Polished mortar, Brick wall, Terracotta tiles, Sand stone,												✓	
Waterproofing													✓
Bathrooms, Kitchens, Balconies, Decks and Swimming pools													✓
Indoor and outdoor plastered wall	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

*Basic repair, **Repairing and preventing cracks, ***Surface finishing for formwork joints

Plastering



คู่แท้อิฐมวลเบา




D01

PLUMB Plastering Mortar for Lightweight Block

Product Information and Instructions for Use
SCAN

มยก.2735-2559



Properties

- For plastering on lightweight block and red block, concrete block, and white block
- Good bonding strength and reduced cracks thanks to special fibers added
- Contain water retention agent preventing water loss
- Smoother plastered surface due to fine sand
- Soft and smooth texture, easy to plaster without much effort
- Can be used with a plastering mortar sprayer
- Suitable for both indoor and outdoor applications
- Certified with TIS 2735-2559


Area Coverage (sq.m./bag)

- Cover an area of approximately 2.6 sq.m. at a thickness of

Pack Size : 40 kg/bag



D02



มยก.1776-2566



D03



มยก.1776-2566

PLUMB Plastering Mortar for General Block

Properties

- For plastering on red block, concrete block, and white block
- Good bonding strength and reduced cracks thanks to special fibers added
- Contain water retention agent preventing water loss
- Smoother plastered surface due to fine sand
- Soft and smooth texture, easy to plaster without much effort
- Can be used with a plastering mortar sprayer
- Suitable for both indoor and outdoor applications
- Certified with TIS 1776-2566

Area Coverage (sq.m./bag)

- Cover an area of approximately 2.4 sq.m. at a thickness of 1 cm.

Pack Size : 40 kg/bag

Product Information and Instructions for Use
SCAN

PLUMB Plastering Mortar for Concrete Block

Properties

- For plastering on concrete structure, column-beam, floor, staircase and elevator concrete wall
- Good bonding strength with reduced peeling off
- Contain water retention agent preventing water loss
- For plastering concrete surfaces (CO). The mortar offers high bond strength and adheres more firmly than general plastering mortar.
- Soft and smooth texture, easy to plaster without much effort
- Can be used with a plastering mortar sprayer
- Suitable for both indoor and outdoor applications
- Certified with TIS 1776-2566

Area Coverage (sq.m./bag)

- Cover an area of approximately 2.4 sq.m. at a thickness of 1 cm.

Pack Size : 40 kg/bag

Product Information and Instructions for Use
SCAN

Thin Plastering / Skim Coat



ผนังเนียนสวย 100%



D15

PLUMB Skim Coat for Decoration and Repair Surfaces (White)

Properties

- Can be used on both bare cement wall and primed wall (Can be applied over existing paint without removing the old coating)
- For fixing coarse-grained, uneven, wavy wall and surface finishing for formwork joints or tiny holes
- For wall application to repair and finish defects along joints between concrete formwork panels
- Contain a variety of specially selected aggregates and special adhesion promoter
- Can be used on bare wall, concrete wall, precast wall, soft wall
- Easy to Sand, Less Effort Strong Skim Coat Surface
- Suitable for both indoor and outdoor applications
- Certified with TIS 3056-2563

Area Coverage (sq.m./bag)

- Cover an area of approximately 20-25 sq.m. at a thickness of 1-2 mm.

Pack Size : 20 kg/bag

Product Information and Instructions for Use
SCAN

มอก.3056-2563






D12



มอก.3056-2563



D13



มอก.3056-2563

PLUMB Skim Coat for Decoration and Repair Surfaces (Grey)

Properties

- Can be used on both bare cement wall and primed wall (Can be applied over existing paint without removing the old coating)
- For fixing coarse-grained, uneven, wavy wall and surface finishing for formwork joints or tiny holes
- For wall application to repair and finish defects along joints between concrete formwork panels
- Contain a variety of specially selected aggregates and special adhesion promoter
- Can be used on bare wall, concrete wall, precast wall, soft wall
- Easy to Sand, Less Effort Strong Skim Coat Surface
- Suitable for both indoor and outdoor applications
- Certified with TIS 3056-2563

Area Coverage (sq.m./bag)

- Cover an area of approximately 20-25 sq.m. at a thickness of 1-2 mm.

Pack Size: 20 kg/bag

Product Information and Instructions for Use
SCAN

PLUMB Skim Coat for Decoration and Repair Surfaces (Light Grey)

Properties

- Can be used on both bare cement wall and primed wall (Can be applied over existing paint without removing the old coating)
- For fixing coarse-grained, uneven, wavy wall and surface finishing for formwork joints or tiny holes
- For wall application to repair and finish defects along joints between concrete formwork panels
- Contain a variety of specially selected aggregates and special adhesion promoter
- Can be used on bare wall, concrete wall, precast wall, soft wall
- Easy to Sand, Less Effort Strong Skim Coat Surface
- Suitable for both indoor and outdoor applications
- Certified with TIS 3056-2563


Area Coverage (sq.m./bag)

- Cover an area of approximately 20-25 sq.m. at a thickness of 1-2 mm.

Pack Size: 20 kg/bag

Product Information and Instructions for Use
SCAN

Thin Plastering / Skim Coat (Modification)

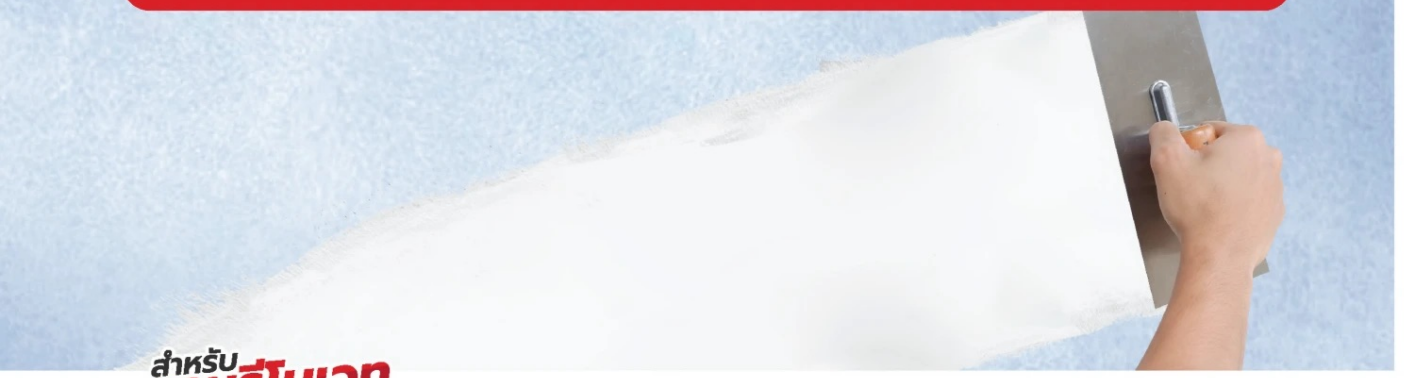

สำหรับงานรีโนเวท



D14

PLUMB Super Skim Coat for Decoration and Repair Surfaces (White)

Product Information and Instructions for Use
SCAN

มอก.3056-2563



Properties

- For Decoration and Repair Surfaces
  New wall : bare cement wall, concrete wall, unpainted surface. or primed surface
  Old wall : can be used on painted wall without the need to peel off the old paint*
- This mortar is formulated with a carefully selected blend of multiple aggregates and additives to deliver maxim
- For fixing coarse-grained, uneven, wavy wall and surface finishing for formwork joints or tiny holes
- For wall application to repair and finish defects along joints between concrete formwork panels
- Can be used on bare wall, concrete wall, precast wall, soft wall
- Easy to Sand, Less Effort Strong Skim Coat Surface
- Suitable for both indoor and outdoor applications
- Certified with TIS 3056-2563

Area Coverage (sq.m./bag)

- Cover an area of approximately 20-25 sq.m. at a thickness of 1-2 mm.

Pack Size : 20 kg/bag





มอก.3056-2563

D16

PLUMB Loft Cement for Decoration

Properties

- For decorative loft wall plastering, and to help correct uneven or imperfect wall surfaces
- Produced from genuine cement. Its natural cement color delivers an authentic loft-style texture
- Can be used on all surfaces
  New wall : bare cement wall, concrete wall, unpainted surface. or primed surface
  Old wall : can be used on painted wall without the need to peel off the old paint*
- Applies with a clear loft-style pattern, easy to sand—no wall sander needed
- Great value—yields more coverage per use
- Suitable for both indoor and outdoor applications
- Certified with TIS 3056-2563

Area Coverage (sq.m./bag)

- Cover an area of approximately 20-25 sq.m. at a thickness of 1-2 mm.

Pack Size : 20 kg/bag

Product Information and Instructions for Use
SCAN





D06

PLUMB Crack Repair Mortar

Properties

- For repairing cracked walls (white mortar).
- Sand-mixed type - contains fine sand, suitable for general plastered cement walls.
- Non-sand type - smooth, fine texture, suitable for skim-coated walls.
- High flexibility-up to 50%.
- Suitable for use on concrete, glass, wood, and plastic surfaces.
- Suitable for both indoor and outdoor use

Area Coverage (sq.m./bag)

- For thin plastering or putty, cover an area of approximately 3-6 sq.m.

Pack Size : 1 kg/bag

Product Information and Instructions for Use
SCAN

*For slippery surfaces with anti-adhesion such as oil-painted surface, shield painted surface or surface with paint peeling off or deteriorated paint, the paint must be removed before applying the product.

Construction Chemicals





D11

PLUMB 2K Flexible Waterproofing Cement

Product Information and Instructions for Use SCAN


Properties

- For waterproofing before tile installation as bathrooms, kitchens, balconies, decks and swimming pools.
- Good flexibility and excellent adhesion
- 100% waterproof
- Conceal small cracks and cover surface pores
- Resistant to weather condition, sun, rain, water pressure
- Can be left as bare surface or painted
- Convenient, fast and easy to mix
- Suitable for indoor and outdoor applications

Area Coverage (sq.m./bag)

- Covering an area of approximately 9 sq.m. (2 coats)

Pack Size : Part A 18 kg, Part B 1 L





D08

PLUMB Bonding Agent Latex

Properties

- For adhesion between existing and new floor
- Excellent adhesion strength, preventing peeling off
- Reduces cracking
- Reduces water leakage
- uitable for various applications, such as floor leveling, concrete surface repair, and tile adhesive, etc.
- Convenient, easy to use, and environmentally friendly
- Suitable for indoor and outdoor applications

Area coverage (sq.m./bag)

- A 1 L-bag can cover an area of approximately 15-20 sq.m.
- A 5 L-bag can cover an area of approximately 75-100 sq.m.

Pack Size : 1 L/bag, 5 L/bag

Product Information and Instructions for Use SCAN



D10

PLUMB Water Repellent Semi-Gloss Coating

Properties

- For wall coating and decorative surfaces
- Waterproof, prevents mold, algae and dirt buildup
- Maintains the original surface color, making the loft pattern clearly visible
- Prevents hard water stains when exposed to moisture
- Resistant to environmental conditions, UV light, sunlight, rain
- Durable and anti-dust, protects and maintains original color of surface
- Suitable for many types of walls such as loft walls, polished mortar, exposed brick wall, terracotta tiles, sandstone, exposed aggregate finish
- Safe without a pungent smell as it doesn't contain any thinner
- Suitable for indoor and outdoor applications

Area Coverage (sq.m./bag)

- A 1 L-bag can cover an area of approximately 8-14 sq.m.
- A 4.5 L-bag can cover an area of approximately 36-63 sq.m.

Pack Size: 1 L/bag, 4.5 L/bag

Product Information and Instructions for Use SCAN

ปูนจิงโจ้

KANGAROO, a good helper for builder

Kangaroo is the national animal of Australia. It is a marsupial mammal with special pouch for its baby. It has long, strong hind legs for long jumps and a strong tail for balance. Kangaroo is a high-energy, alert, gregarious, family-loving and friendly animal.

KANGAROO, or known as "PURPLE KANGAROO" among the builders, is the first masonry mortar brand for lightweight block in Thailand with a technology from Australia combining with modern innovations to meet the needs of surface and structural works.

KANGAROO is a representative brand of mortar products for concrete structure, adhesive, and concrete floor under Quick Coat Products Co., Ltd.

In addition, the characteristics of kangaroo reflect the enthusiasm, optimism and friendliness that Quick Coat strives to offer its customers through unsurpassed and accessible service. The kangaroo also represents the identity of the executive who drives the organization with positive energy and treats its personnel like his own family members.





NEW

มอก.2706-2559

KANGAROO 2IN1

No.1 Masonry and Tile Adhesive



High Bond Strength

Foor-Wall

*Tested to tile-adhesive standards;
suitable for both floor and wall applications. For indoor use only.

NEW

KANGAROO Floor Leveling Mortar

At a thickness of 1-3 cm



Smooth & Strong
No cracking, No peeling

Ready for All flooring materials

✓ Tile Adhesive ✓ Rubber tile
✓ Laminate ✓ Parquet ✓ SPC

ปูนจิงโจ้


Comparison of applications of products

ชนิดของผลิตภัณฑ์	Mansory		Tile Adhesive						Flooring and Leveling				Repair
	 J07	 J01	 J07	 J08	 J09	 J10	 J11	 J12	 J02	 J03	 J04	 J05	 J13
	Masonry and Tile Adhesive Mortar	Masonry Mortar for General Block	Masonry and Tile Adhesive Mortar	SuperSave Tile Adhesive Mortar	Standard Tile Adhesive Mortar	Waterproof Tile Adhesive Mortar	Highest Strength Tile Adhesive Mortar	Premium cement grout	Easy Floor Screed	Floor Leveling Mortar	Dry Premixed Concrete	Non-Shrink GROUT	Repair Mortar
Wall material													
Lightweight block	✔		✔										✔
Red block, General block, White block		✔											
Tiles													
Terracotta tile, mosaic, ceramic tile (normal water absorption)	★★		★★	★★	★★★	★★★	★★★						★★
Porcelain tile, Granito (low water absorption)	★★		★★	★★	★★★	★★★	★★★						★★
Marble, granite (for interior wall and floor covering)					★★	★★★	★★★						
Natural stone						★★	★★★						
Glass mosaic, Resin mosaic						★★	★★★						
Tiles Sizes													
Small : 15x15 - 45x45 cm.	★★		★★	★★★	★★★	★★★	★★★						★★
Medium : 60x60 cm.	★★		★★	★★	★★★	★★★	★★★						★★
Large : 90x90 cm., 60x80 cm., 60x120 cm.				★★	★★★	★★★	★★★						
Extra large : 100x100 cm.						★★	★★★						
Super Extra : 100x150 cm.							★★★						
Area													
No need to immerse the tiles in water before installation	★★★		★★★	★★★	★★★	★★★	★★★						★★★
Indoor floor	★★★		★★★	★★★	★★★	★★★	★★★						★★★
Indoor wall	★★★		★★★	★★★	★★★	★★★	★★★						★★★
Outdoor floor				★	★★	★★★	★★★						
Outdoor wall				★	★★	★★★	★★★						
Swimming pool						★★★	★★★						
Spcial surface													
Tiling over existing tile							★★★						
Fiber cement board, Cement board, Structural plywood							★★★						
Gypsum board							★★★						
Cement Grout													
Grout line width: 1-6 mm.								★★★					
Prevents and inhibits black mold								★★					
Reduces water leakage, the cause of the fungus.								★					
Floor													
Floor Leveling 1-3 cm. Floor leveling before laying tiles, rubber tile, laminate, parquet, etc.									✔				
Floor Leveling 3-5 cm. Floor leveling for rough or polished concrete floor										✔			
Ligament and lintel such as reinforced concrete flashing, countertop, terrace											✔		
Grouting concrete surface, leveling precast concrete column base, leveling concrete column head for beam support, leveling steel plate base for machine installation and steel column base												✔	
Repairs Cracks, Repairs Flaking Walls, Wall Grooves, Fills Wall Holes													✔

*งานซ่อมเบื้องต้น

★ Fair ★★ Good ★★★ Excellent

Mansory

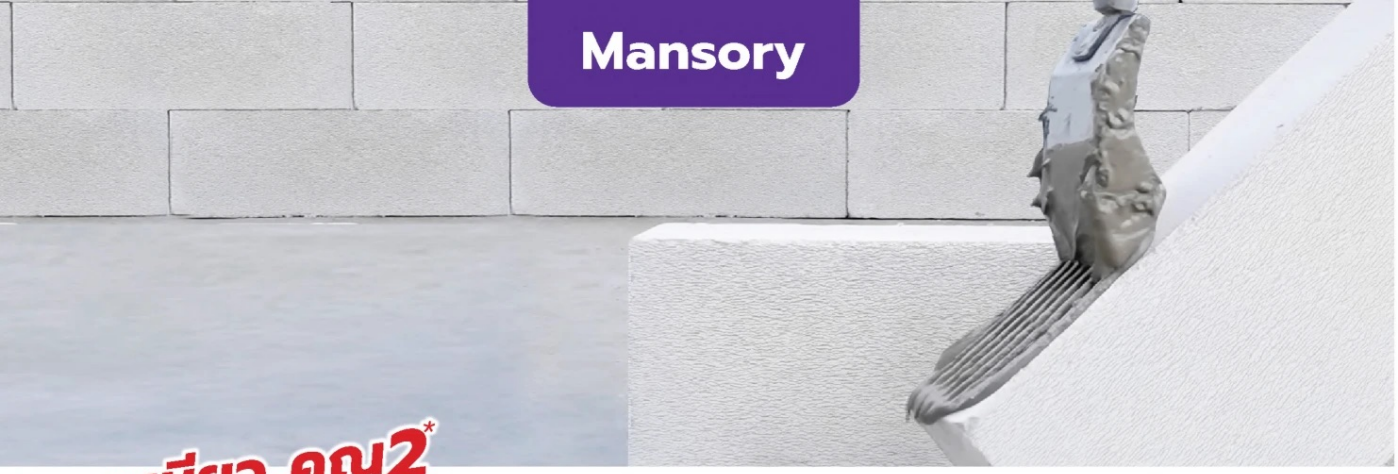

เหนียว..คูณ2*



CP007

KANGAROO 2IN1
Masonry and Tile Adhesive Mortar

Masonry Mortar for Lightweight Block

- Highest quality masonry mortar for lightweight block wall
- Quick dry masonry mortar, reducing the need to pour water on the blocks before masonry
- Tough and not crumbly texture with short setting time
- Excellent adhesion within 10 seconds with right setting time for block alignment.
- Apply in a thin layer to save material—only 2–3 mm thick
- Certified with TIS 2706-2559


Product Information and Instructions for Use SCAN

มยก.2706-2559

Area Coverage (sq.m./bag)

Lightweight block wall


Block thickness	7.5 cm.	10 cm.
Average coverage	26 sq.m	19.5 sq.m



Pack Size : 40 kg/bag

**Tested to tile-adhesive standards; suitable for both floor and wall applications. For indoor use only.*





มยก.598-2566

CP008

KANGAROO Masonry Mortar for General Block

Properties

- Masonry mortar for general block such as red block, concrete block and white block
- Contains a varies ty of special selected aggregates for good bonding strength, durable, tough
- Strong and sticky, bonds well to bricks, and provides high strength
- Contains water retention agent
- Convenient, easy to use, and delivers quality results
- Suitable for small storage areas, high-rise buildings or additions
- Certified with TIS 598-2566

Area Coverage (sq.m./bag)

Area coverage at a line thickness of 1-1.5 cm

Type of block	Red block	Concrete block	White block
Average coverage	1.0 sq.m	2.1 sq.m	1.9 sq.m

Product Information and Instructions for Use SCAN

Pack Size : 40 kg/bag





CP009

KANGAROO Floor Leveling Mortar 3-5 cm.

Properties

- General floor leveling, floor leveling for tiling, floor leveling forrough or polished concrete floor
- Contains special selected aggregates and high-quality chemicals for improved fluidity, easy floor leveling
- Strong and durable—helps reduce cracking and peeling
- More cost-saving, faster to work with, and delivers high-quality results


Area Coverage (sq.m./bag)

- Cover a floor area of approximately 0.45-0.75 sq.m at a thickness of 3-5 cm

Pack Size : 40 kg/bag

Product Information and Instructions for Use SCAN

Flooring and Leveling

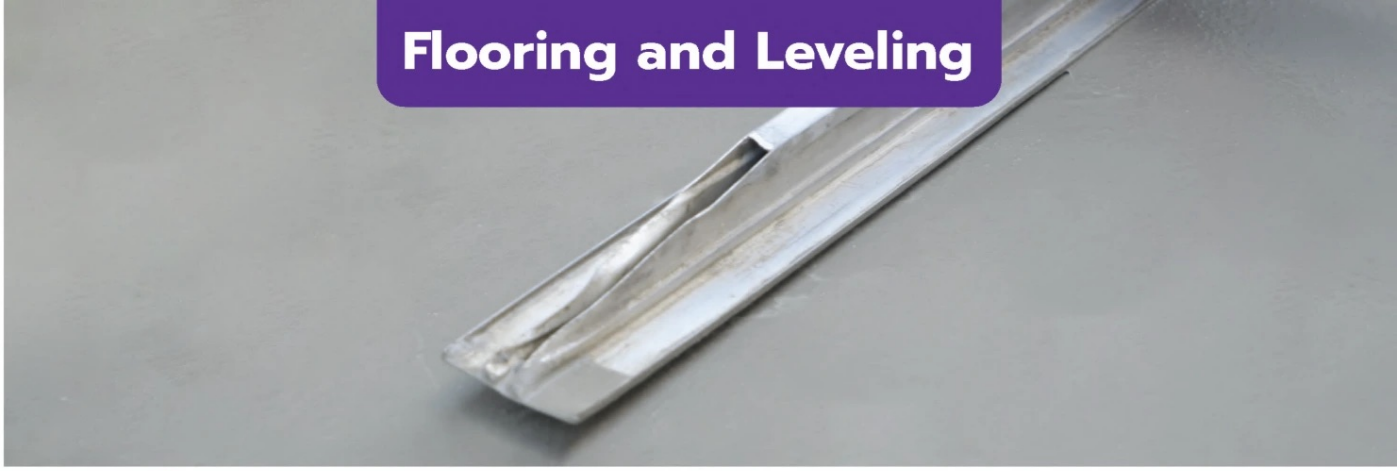

NEW



JF101

KANGAROO Floor Leveling Mortar 1-3 cm.

Easy Floor Screed

Properties

- Suitable for floor leveling, thin leveling, concrete floor for decorative materials, such as rubber tile, laminate, parquet, etc.
- Made with a specially selected blend of premium ingredients, Good fluidity, easy floor leveling
- Smooth, tough and durable floor, reduces cracking
- Cost savings, get quality results faster

Area Coverage (sq.m./bag)

- Covering an area of approximately 0.60-2.0 sq.m. at a thickness of 1-3 cm

Pack Size : 40 kg/bag

Product Information and Instructions for Use

SCAN





CP104




มอก.3202-2564

NEW



JN450



KANGAROO Dry Premixed Concrete (240 KSC)

Properties

- For general concrete pouring. Compressive stress up to 240 KSC
- Suitable for pouring concrete for tie columns and lintels, concrete countertops, and reinforced concrete wing-wall construction projects
- High quality concrete for better fluidity, convenience, quick and stronger
- Reduce air gap after removing the formwork ensuring high-quality work
- Fast and convenience, suitable for the site with limited storage space
- Certified with TIS 3202-2564

Area Coverage (sq.m./bag)

- Cover an area of approximately 0.40 sq.m. at a thickness of 5 cm

Pack Size : 40 kg/bag

Product Information and Instructions for Use

SCAN

KANGAROO Non-Shrink Grout (450 KSC)

Properties

- For load-bearing grouting to fill gaps and voids between concrete-to-concrete and concrete-to-steel structures, such as: grouting to fill cavities/voids on concrete surfaces; grouting for leveling and bedding precast concrete column bases; grouting joints between concrete wall panels or other precast structural joints; and grouting for leveling steel base plates supporting machinery loads and steel column bases. Especially suitable for high-load applications, with compressive strength up to 450 ksc
- Contains a specially selected blend and high-quality chemical additives to improve flowability.
- Easy to pour, strong floor surface with minimal shrinkage.
- Easy to pour into formwork without leaving voids.

Area Coverage (sq.m./bag)

- Cover an area of approximately 0.20-0.25 square meters at a thickness of 3-5 cm

Pack Size : 40 kg/bag

Product Information and Instructions for Use

SCAN

Tile Adhesive



ติดหนึบ พื้น-ผนัง



J07

KANGAROO 2IN1
Masonry and Tile Adhesive Mortar

Tile Adhesive


- Great for tiles up to 60×60 cm
- Suitable for tiles with as terracotta tile, ceramic, granito and porcelain
- Reduces the work steps by eliminating the immersion process
- Tough texture with right setting time for tile alignment
- Excellent adhesion strength
- Excellent tile adhesion
- Suitable for both floor and wall, indoor applications

ข้อมูลผลิตภัณฑ์และวิธีใช้งาน สแกน

Area Coverage (sq.m./bag)

Tile adhesive

Size of notched trowel	3 mm.	6 mm.	9 mm.	12 mm.
Approximate area coverage	12 sq.m	6 sq.m	4 ตรม.	3 sq.m



Pack Size : 40 kg/bag

**Tested to tile-adhesive standards; suitable for both floor and wall applications. For indoor use only.*






มอก.2703-2566

J09





J08

GREEN KANGAROO
Standard Tile Adhesive Mortar

Properties

- Great for large tiles up to 90×90* cm
- Suitable for tiles with as terracotta tile, ceramic, granito, porcelain and mosai Ideal for marble and granito up to 60×80 cm (for flooring)
- Reduces the work steps by eliminating the immersion process
- High bond strength
- Tough texture with long setting time for tile alignment
- Good adhesion, durable, and not peeling off
- Suitable for both floor and wall, indoor and outdoor applications
- Certified with TIS 2703-2566

ข้อมูลผลิตภัณฑ์และวิธีใช้งาน สแกน

Area Coverage (sq.m./bag) Tile adhesive

Size of notched trowel	3 mm.	6 mm.	9 mm.	12 mm.
Approximate area coverage	12 sq.m	6 sq.m	4 ตรม.	3 sq.m

Pack Size : 20 kg/bag

BLUE KANGAROO
Super Save Tile Adhesive Mortar

Properties

- Great for tiles up to 60×60 cm
- Suitable for tiles with as terracotta tile, ceramic, granito and porcelain
- Reduces the work steps by eliminating the immersion process
- Tough texture with right setting time for tile alignment
- Excellent adhesion strength
- Excellent tile adhesion
- Suitable for both floor and wall, indoor applications

Area Coverage (sq.m./bag)

Tile adhesive

Size of notched trowel	3 mm.	6 mm.	9 mm.	12 mm.
Approximate area coverage	12 sq.m	6 sq.m	4 ตรม.	3 sq.m


Pack Size : 20 kg/bag

ข้อมูลผลิตภัณฑ์และวิธีใช้งาน สแกน

**For wall tiles 60×60 cm and larger, temporary supports (nails/ledger) are recommended to prevent slippage.*

Tile Adhesive





มอก.2703-2566

J10





มอก.2703-2566

J11

RED KANGAROO
Waterproof Tile Adhesive Mortar

Properties

- Can be used to install large tiles up to 100×100 cm
- For installation of general tiles, ceramics, mosaics, porcelain, granitos, marble, granite (natural stone size of 60×60 cm)
- Reduces the work steps by eliminating the immersion process
- Excellent adhesion
- Resistant to water, chlorine, salt water (Pool Standards)
- Durable even in waterlogged conditions, bathrooms, kitchens and swimming pools
- Suitable for both floor and wall, indoor and outdoor applications
- Certified with TIS 2703-2566

Area Coverage (sq.m./bag) Tile adhesive

Size of notched trowel	3 mm.	6 mm.	9 mm.	12 mm.
Approximate area coverage	12 sq.m	6 sq.m	4 ตรม	3 sq.m

Pack Size : 20 kg/bag

ข้อมูลผลิตภัณฑ์และวิธีใช้งาน สแกน

GOLDEN KANGAROO
Highest Strength Tile Adhesive Mortar

Properties

- Suitable for extra large tiles 100×100 cm and over
- For installation of general tiles, ceramics, mosaics, porcelains, granitos, marble, granite, natural stone and glass mosaic
- Can be used on all surfaces and materials such as plywood, fiber cement board, viva board and cement board.
- You can lay tiles over the existing tiles
- Good flexibility with highest adhesion strength
- Sticky and tough texture for good adhesion, durable, eliminating tilefalling off
- Resistant to vibration
- Suitable for both floor and wall, indoor and outdoor applications
- Certified with TIS 2703-2566

Area Coverage (sq.m./bag) Tile adhesive

Size of notched trowel	3 mm.	6 mm.	9 mm.	12 mm.
Approximate area coverage	12 sq.m	6 sq.m	4 ตรม	3 sq.m

Pack Size : 20 kg/bag

ข้อมูลผลิตภัณฑ์และวิธีใช้งาน สแกน



J12

KANGAROO
Premium Cement Grout (White)

Properties

- Suitable for general tile grout.
- Excellent adhesion, eliminating tile falling off
- Reduces stubborn dirt stain buildup with hydrophobic agent added
- Reduces water leakage, the cause of the fungus.
- Prevents and inhibits black mold
- Long service life with greater durability without cracking
- Ideal for grouting indoor and outdoor floor or wall
- Grout line width : 1-6 mm.

Area Coverage (sq.m./bag)

- Covering an area of approximately 4-23 sq.m.

Pack Size : 1 kg/bag

ข้อมูลผลิตภัณฑ์และวิธีใช้งาน สแกน





J13

KANGAROO Repair Mortar

คุณสมบัติ

- Versatile for a wide range of jobs: repairing cracks, repairs Flaking Walls, filling electrical conduit channels, installing interior tiles, and laying and plastering lightweight bricks.
- Easy to use - simply open the bag, mix with water, and it is ready for application.
- High bonding strength for a strong and durable finish that resists debonding and spalling.
- Contains a water-retention agent that reduces rapid moisture loss, a common cause of cracking.

พื้นที่การใช้งาน (ตร.ม./ถุง)

- ซ่อมที่ความหนา 2 ซม. ได้พื้นที่ประมาณ 0.06 ตร.ม.

Area Coverage (sq.m./bag)

- Repairs approximately 0.06 sq.m. at a thickness of 2 cm.

Pack Size : 2 kg/bag

ข้อมูลผลิตภัณฑ์และวิธีใช้งาน สแกน

PROJECT RE



The Crystal Solana
Ekamai - Raminthra



The Grand
Pinklao



Santiburi The Residences
Bueng Kum



S'RIN
Ratchapruek-Sai 1



Malton Gates
Krungthep Kreetha



Nantawan
Rama 9 - New Krungthep Kreetha



The Royal Residence
Kaset-Nawamin



Bangkok Boulevard Rama 9
Raminthra - Seri Thai 2



Silverlake Vind
Suwinthawong 78 - Nong Chok



Baan puripuri
Lat Phrao 41

EFERENCES



One Bangkok
Lumpini



SMYTH'S
Kaset-Nawamin



Sonle Residences
Wongsawang



Bu Gaan
Yothinpattana



Burasiri
Krungthep Kreetha



Coco Parc Condo
Rama 4



Whizdom the Forestias
Bangna



Once Pattaya
Pattaya



RISE 46
Watcharapol-Sukhapiban 5



Hampton Residence
Phyathai



Rhythm
Ekamai

QUICKCOAT | THE MORTAR EXPERT

Quick Coat Products Co.,Ltd.
184 moo 7 Nakhon In Rd., Bang Khu Wiang, Bang Kruai, Nonthaburi 11130
02 408 9888 www.quickcoat.co.th @quickcoat
Technical Support Hotline 02 408 9888 ext. 204

SCAN ME